# **Paralleloslide**

Equipment Manufacturer



FUN-1498



# **Paralleloslide**

Equipment Manufacturer



FUN-1498










1

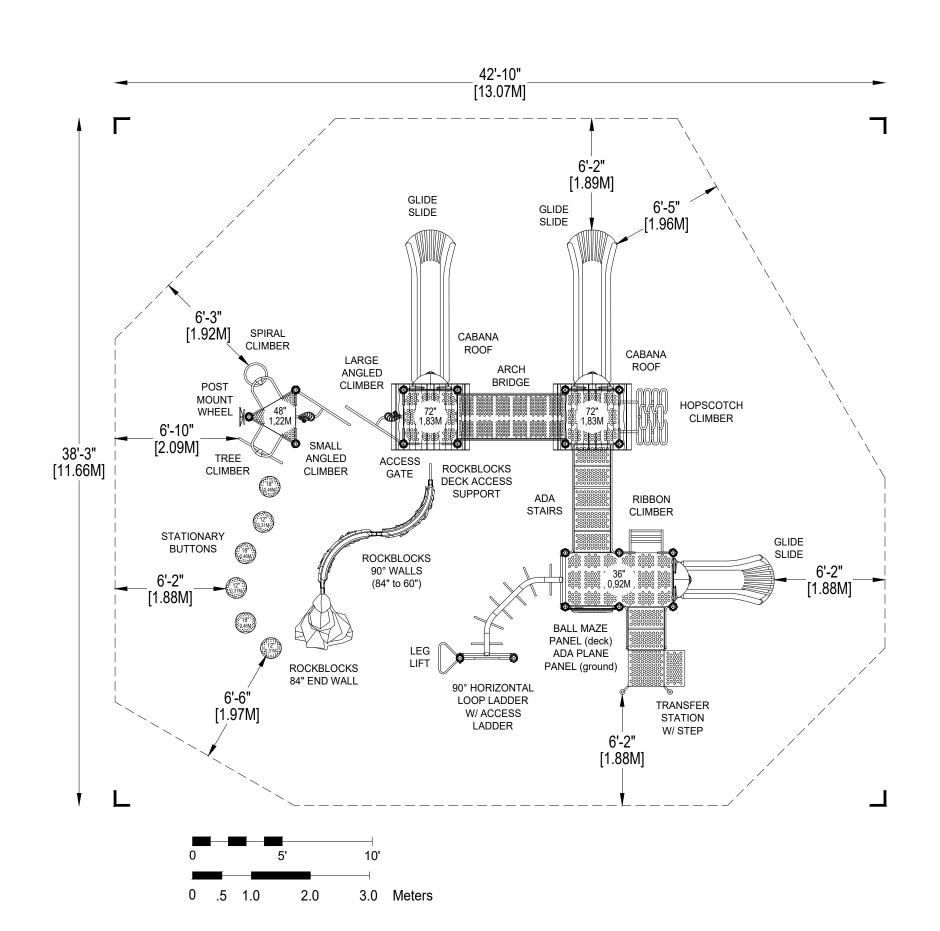



PLAYWORLD SYSTEMS, INC.

1000 Buffalo Road Lewisburg, PA 17837-9795 USA

**EQUIPMENT SIZE:** 

30'6" x 25'10" x 14'4"

9,3M x 7,87M x 4,37M

USE ZONE: 42'10" x 36'3"

13,07M x 11,66M

AREA: 1380 SqFt. PERIMETER: 138 Ft.

128,21 SqM.

42,06M

FALL HEIGHT:

9 Ft.

2,74M

AGE GROUP:

USER CAPACITY: 65

5-12

		JLE	Total Elevated Play Activities: 12					
		EDL	Total Ground-Level Play Activities: 4					
		ADA SCHEDULE	Accessible Elevated Activities	Accessible Ground-Level Activities	Accessible Ground-Level Play Types			
	Required Provided		6	4	3			
			10	4	3			

✓ ASTM F1487-11

✓ CPSC #325

30-JAN-18



PROJECT NO:	SCALE:
FUN-1498D	3/16"=1'-0"
DRAWN BY:	Paper Size
M. MERTZ	T upor oizo
DATE:	l B
00 144140	

\*PLAYGROUND SUPERVISION REQUIRED

PERIMETER:

OSL

Ш

ARAL

1

CATALOG PRE-DESIGN

FALL HEIGHT: **9 Ft.** 

13,07M x 11,66M

AREA:

1380 SqFt.

128,21 SqM.

> PLAYWORLD

2,74M

USER CAPACITY: AGE GROUP: 65 5-12

65	5-12

	E)	Total Elevate	12					
	ED	Total Ground	Total Ground-Level Play Activities: 4					
	ADA SCHEDULE	Accessible Elevated Activities	Accessible Ground-Level Activities	Accessible Ground-Level Play Types				
Requ	iired	6	4	3				
Provided		10	4	3				


✓ ASTM F1487-11

✓ CPSC #325

30-JAN-18




PROJECT NO: FUN-1498D	SCALE: 3/16"=1'-0"
DRAWN BY:	Paper Size
M. MERTZ	
DATE:	В
20 141140	

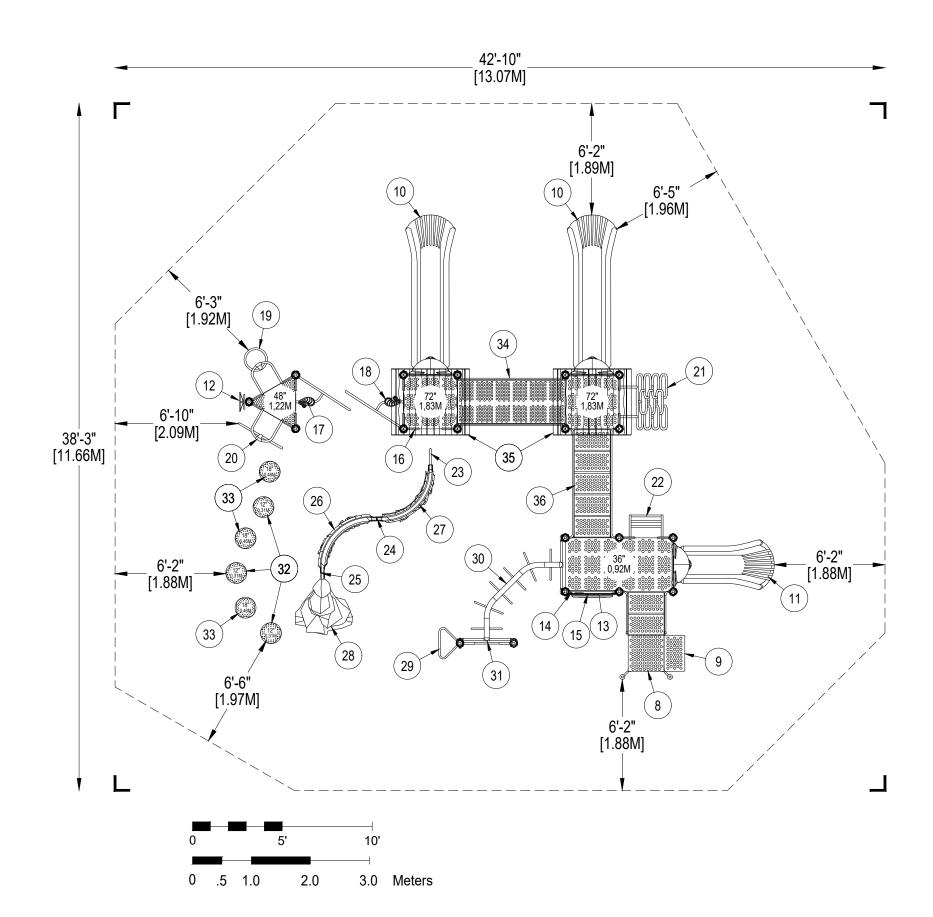

\*PLAYGROUND SUPERVISION REQUIRED


#### DETAIL 1

#### Support Post, Spiral Slide and RockBlocks Post Footing Detail

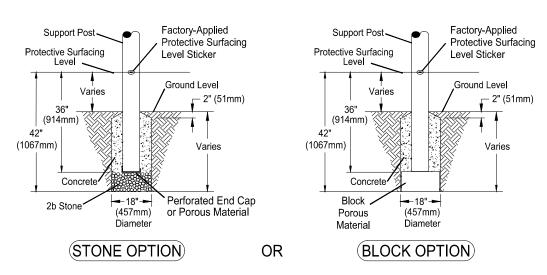

#### DETAIL 2

#### GroundZerO. Cantilever and "T" Post Footing Detail

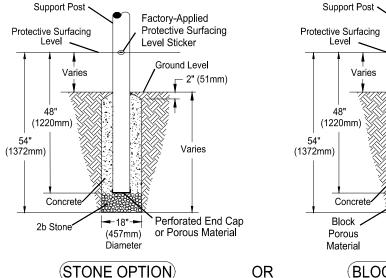


(BLOCK OPTION)

(457mm)


Diameter

## DETAIL 3 Component Footing Detail

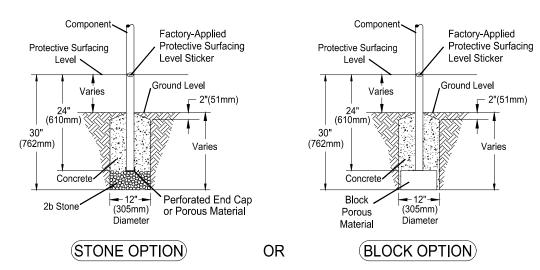

# DETAIL 4

#### Surface Mount Detail

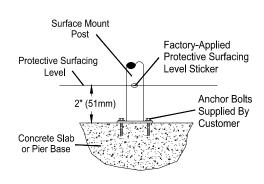

#### **INSTALLATION NOTES:**

1) Paved surfaces, such as asphalt and concrete, are not acceptable for use under your structure.

Factory-Applied

Level Sticker

Protective Surfacing

Ground Level

Varies

2" (51mm)

- 2) It is the consumer's responsibility to check with local utilities prior to excavating footings for any underground utility lines that may exist within the installation area.
- 3) It is the consumer's responsibility to check local soil conditions and drainage within the site area. Inquire with local contractors for appropriate recommendations.
- 4) If the structure is to be installed across uneven terrain maintain the support post mark for protective surfacing level at the lowest grade. Adjust other footings accordingly.
- 5) The base of footings must be below frost lines.
- 6) Do not encase the bottom of support posts in concrete. Place all posts directly on packed stone.
- 7) Assemble the entire structure before pouring concrete unless specifically instructed to do so in the individual component installation instructions.
- 8) Read completely the installation instructions provided with your structure prior to beginning construction.

#### SITE NOTES:

- 1) The site plan provided must be checked against the actual site area to ensure that placement of your structure meets required clearances.
- 2) The dimensions labeled are for location of footing holes, not exact placement of equipment. Assemble, plumb, and level equipment before pouring concrete.
- 3) There must be a minimum distance of 6' (1830mm) between any obstacle, sidewalk, etc., and your structure.
- 4) Slides must have a use zone that extends out from the lower exit section of the slide a distance that is at least 6' (1830mm) or equal to the vertical distance from the highest point of the sliding surface to the top of the protective surfacing, whichever is greater. The slide use zone should not extend greater than 8' (2438mm) from the end of the lower exit section
- 5) The complete area, including the space under and around the equipment, must be covered with an impact attenuating material. See the 1997 publication, "Handbook for Public Playground Safety" published by the U.S. Consumer Product Safety Commission, for guidelines and recommendations on the type and depth of surfacing material. For a copy of the "Handbook for Public Playground Safety" write to: U.S. Consumer Product Safety Commission Office of Information and Public Affairs

Washington, D.C. 20207


6) Supervise children as they play

# ⇒ PLAYWORLD\*

PLAYWORLD SYSTEMS, INC.

1000 Buffalo Road Lewisburg, PA 17837-9795 USA

#### FOOTING LEGEND



COMPONENT FOOTING (DETAIL 3)



CHALLENGERS

**PLAYMAKERS** 

F0

SPIRAL SLIDE CENTER POST FOOTING (DETAIL1)



SUPPORT POST FOOTING (DETAIL 1 or 4) (112" INDICATES POST LENGTH)



CANTILEVER, "T" POST, AND COMPONENT POST FOOTING (DETAIL 2) (ZZCH1850 INDICATES PART NUMBER)



GROUND ZERO POST FOOTING (DETAIL 2) (144" INDICATES POST LENGTH)

**FOOTING DETAIL** 

SCALE: NOT TO SCALE

DRAWN BY: **TECH SALES** 

28-JUNE-13

Paper Size

В



PLAYWORLD SYSTEMS, INC.

1000 Buffalo Road Lewisburg, PA 17837-9795 USA

#### FOOTING LEGEND



COMPONENT FOOTING (DETAIL 3)



SPIRAL SLIDE CENTER POST FOOTING (DETAIL1)



SUPPORT POST FOOTING (DETAIL 1 or 4) (112" INDICATES POST LENGTH)



CANTILEVER, "T" POST, AND COMPONENT POST FOOTING (DETAIL 2) (ZZCH1850 INDICATES PART NUMBER)



GROUND ZERO POST FOOTING (DETAIL 2) (144" INDICATES POST LENGTH)

PROJECT NO: FUN-1498D

SCALE: 1/4"=1'-0"

DRAWN BY:

Paper Size

DATE: **30-JAN-18** 

B

\*PLAYGROUND SUPERVISION REQUIRED

PARALLELOSLIDE CATALOG PRE-DESIGN

Design Number: FUN-1498D - Bill Of Material

Ref.

No.	Part No.	Description	Quantity
	Posts		
1	ZZCH0018	3.5in OD x 124in STEEL POST W/RIVETED CAP	4
2	ZZCH0028	3.5in OD x 136in STEEL POST W/ RIVETED CAP	6
3	ZZCH0038	3.5in OD x 148in STEEL POST W/ RIVETED CAP	1
4	ZZCH0069	3.5in OD x 184in STEEL POST W/O CAP	8
	Decks & Kic	k Plates	
5	ZZCH0616	SQUARE COATED DECK ASSEMBLY	2
6	ZZCH0617	TRIANGULAR COATED DECK ASSEMBLY	1
7	ZZCH0629	LONG COATED DECK ASSEMBLY	1
	<b>ADA Items</b>		
8	ZZCH2007	TRANSFER STATION w/TALL GUARDRAIL (36in DECK)	1
9	ZZUN2019	APPROACH STEP FOR TRANSFER STATION	1
	Slides		
10	ZZCH2696	GLIDE SLIDE (72in DECK)	2
11	ZZCH3127	GLIDE SLIDE (36in DECK)	1
	<b>Activity Pan</b>	els	
12	ZZCH4290	POST MOUNTED STEERING WHEEL	1
13	ZZCH4399	ACCESSIBLE PLANE PANEL	1
14	ZZCH4807	OVAL INSERT PANEL (DECK MOUNT)	1
15	ZZUN4798	BALL MAZE PANEL INSERT	1
	<b>Barriers</b>		
16	ZZCH4288	ACCESS GATE	1
	Climbers		
17	ZZCH7180	ANGLED CLIMBER SMALL (48in DECK)	1
18	ZZCH7196	ANGLED CLIMBER LARGE (72in DECK)	1
19	ZZCH8150	SPIRAL CLIMBER (48in DECK)	1
20	ZZCH8190	TREE CLIMBER (48in DECK)	1
21	ZZCH8280	HOPSCOTCH CLIMBER (72in DECK)	1
22	ZZCH8289	RIBBON CLIMBER (36in DECK)	1
23	ZZUN0168	ROCKBLOCKS DECK ACCESS SUPPORT (60in - 72in DECK)	1
24	ZZUN0169	ROCKBLOCKS Z SUPPORT (RAISED 60in WALL)	1
25	ZZUN0177	ROCKBLOCKS Z SUPPORT (84in WALL)	1
26	ZZUN8358	ROCKBLOCKS 90 DEGREE WALL (84in to 60in)	1
27	ZZUN8370	ROCKBLOCKS 90 DEGREE WALL (84in TO 60in) RIGHT	1
	Ground Zer	O Climbers	
28	ZZUN8236	ROCKBLOCKS END WALL (84in)	1
	Overhead Ev	vents	
29	ZZCH5770	LEG LIFT	1
30	ZZCH5850	90 DEGREE HORIZONTAL LOOP LADDER	1
31	ZZCH5970	OVERHEAD EVENT ACCESS LADDER (36in DECK)	1
	Balance		
32	ZZUN7140	STATIONARY BUTTONS (12in)	3
33	ZZUN7146	STATIONARY BUTTONS (18in)	3



Design Number: FUN-1498D - Bill Of Material

Ref.

No.	Part No.	Description	Quantity
	Bridges		
34	ZZCH6595	6ft ARCH BRIDGE	1
	Roofs & Arcl	hes	
35	ZZCH9846	CABANA ROOF	2
	Stairs and La	adders	
36	ZZCH9177	36in ACCESS STEPPED PLATFORM (DECK TO DECK)	1
	<b>Additional T</b>	ool & Maintenance Kits	
37	ZZCHGUID	CHALLENGER GUIDELINES	1
38	ZZUN9910	SURFACING WARNING LABEL KIT	1
39	ZZUN9930	PIPE SYSTEMS MAINTENANCE KIT W/ AEROSOL	1

Design Number: FUN-1498D - Compliance and Technical Data

Reference Document: ASTM F1487

Ref. No.	Part No.	Qty.	Description	Unit ASTM Status	Total Weight (lbs)	Pre- Post- Consumer Recycled Content (lbs)	CO2e Footprint (kgs)	Users	Install Hours	Concrete (Yds3)	Active Play Events
1	ZZCH0018	4	3.5in OD x 124in STEEL POST W/RIVETED CAP	Certified	155.64		215	0	4.00	0.50	0
2	ZZCH0028	6	3.5in OD x 136in STEEL POST W/ RIVETED CAP	Certified	261.06		351	0	6.00	0.75	0
3	ZZCH0038	1	3.5in OD x 148in STEEL POST W/ RIVETED CAP	Certified	47.11		63	0	1.00	0.13	0
4	ZZCH0069	8	3.5in OD x 184in STEEL POST W/O CAP	Certified	453.68		584	0	8.00	1.00	0
5	ZZCH0616	2	SQUARE COATED DECK ASSEMBLY	Certified	109.72		348	6	2.00	0.00	0
6	ZZCH0617	1	TRIANGULAR COATED DECK ASSEMBLY	Certified	29.90		120	2	1.00	0.00	0
7	ZZCH0629	1	LONG COATED DECK ASSEMBLY	Certified	107.02		318	6	1.00	0.00	0
8	ZZCH2007	1	TRANSFER STATION w/TALL GUARDRAIL (36in DECK)	Certified	148.40		310	2	2.00	0.09	0
9	ZZUN2019	1	APPROACH STEP FOR TRANSFER STATION	Certified	35.83		72	1	1.00	0.04	0
10	ZZCH2696	2	GLIDE SLIDE (72in DECK)	Certified	303.26		1,306	4	4.00	0.06	2
11	ZZCH3127	1	GLIDE SLIDE (36in DECK)	Certified	99.73		374	2	2.00	0.03	1
12	ZZCH4290	1	POST MOUNTED STEERING WHEEL	Certified	7.83		44	1	0.25	0.00	1
13	ZZCH4399		ACCESSIBLE PLANE PANEL	Certified	22.67		212	1	0.50	0.00	1
14	ZZCH4807	1	OVAL INSERT PANEL (DECK MOUNT)	Certified	28.16		211	0	0.50	0.00	0
15	ZZUN4798		BALL MAZE PANEL INSERT	Certified	20.48		121	1	0.50	0.00	1
16	ZZCH4288	1	ACCESS GATE	Certified	17.34		65	0	0.50	0.00	0
17	ZZCH7180	1	ANGLED CLIMBER SMALL (48in DECK)	Certified	55.71		173	2	1.00	0.00	1
18	ZZCH7196	1	ANGLED CLIMBER LARGE (72in DECK)	Certified	62.71		182	2	1.00	0.00	1
19	ZZCH8150	1	,	Certified	86.33		204	2	1.00	0.03	1
20	ZZCH8190	1	TREE CLIMBER (48in DECK)	Certified	73.93		176	2	1.50	0.03	1
21	ZZCH8280	1	HOPSCOTCH CLIMBER (72in DECK)	Certified	82.50		161	2	2.00	0.06	1
22	ZZCH8289	1	RIBBON CLIMBER (36in DECK)	Certified	35.02		101	2	1.50	0.06	1
23	ZZUN0168	1	ROCKBLOCKS DECK ACCESS SUPPORT (60in - 72in DECK)	Certified	57.11		90	1	1.00	0.13	1



Design Number: FUN-1498D - Compliance and Technical Data

Reference Document: ASTM F1487

Ref. No.	Part No.	Qty.	Description	Unit ASTM Status	Total Weight (lbs)	Pre- Post- Consumer Recycled Content (lbs)	CO2e Footprint (kgs)	Users	Install Hours	Concrete (Yds3)	Active Play Events
24	ZZUN0169	1	ROCKBLOCKS Z SUPPORT (RAISED 60in WALL)	Certified	59.01		72	0	1.00	0.13	0
25	ZZUN0177	1	ROCKBLOCKS Z SUPPORT (84in WALL)	Certified	39.41		56	0	1.00	0.13	0
26	ZZUN8358	1	ROCKBLOCKS 90 DEGREE WALL (84in to 60in)	Certified	119.07		824	4	0.50	0.00	1
27	ZZUN8370	1	ROCKBLOCKS 90 DEGREE WALL (84in TO 60in) RIGHT	Certified	108.96		843	4	0.50	0.00	1
28	ZZUN8236	1	ROCKBLOCKS END WALL (84in)	Certified	103.89		551	3	1.00	0.13	1
29	ZZCH5770	1	LEG LIFT	Certified	6.76		30	1	0.50	0.00	1
30	ZZCH5850	1	90 DEGREE HORIZONTAL LOOP LADDER	Certified	67.90		198	2	1.00	0.00	1
31	ZZCH5970	1	OVERHEAD EVENT ACCESS LADDER (36in DECK)	Certified	25.12		71	1	1.50	0.06	0
32	ZZUN7140	3	STATIONARY BUTTONS (12in)	Certified	81.36		269	3	2.25	0.39	3
33	ZZUN7146	3	STATIONARY BUTTONS (18in)	Certified	83.76		275	3	2.25	0.39	3
34	ZZCH6595	1	6ft ARCH BRIDGE	N/A	183.35		415	0	1.50	0.00	0
35	ZZCH9846	2	Cabana Roof	Certified	152.10		779	0	1.00	0.00	0
36	ZZCH9177	1	36in ACCESS STEPPED PLATFORM (DECK TO DECK)	Certified	217.24		550	2	1.50	0.00	0
37	ZZCHGUID	1	CHALLENGER GUIDELINES	N/A	0.00		1	0	0.25	0.00	0
38	ZZUN9910	1	SURFACING WARNING LABEL KIT	Certified	0.05		1	0	0.25	0.00	0
39	ZZUN9930	1	PIPE SYSTEMS MAINTENANCE KIT W/ AEROSOL	N/A			90				
			1	Γotals:	3,549.12	431 920	10,825	62	59.25	4.13	24
					1,597.10 K	g 194 Kg 414	Kg 11	Metric T	ons	3.14	m3

Thursday, October 26, 2017 Page 2 of 3 Playworld.com

Design Number: FUN-1498D - Compliance and Technical Data

Reference Document: ASTM F1487

				Pre- Post-					
		Unit	Total	Consumer	CO2e				Active
Ref.		ASTM	Weight	Recycled Content	Footprint		Install	Concrete	Play
No. Part No.	Qty. Description	Status	(lbs)	(lbs)	(kgs)	Users	Hours	(Yds3)	Events



#### **ASTM F1487**

The lay-out for this custom playscape, design number FUN-1498D, has been configured to meet the requirements of the ASTM F1487 standard. In addition, each of the above components listed as "Certified" have been tested and are IPEMA certified. Components listed as "Not Applicable" do not fall within the scope of the ASTM F1487 standard and have not been tested. IPEMA certification can be verified on the IPEMA website, www.ipema.org. In the interest of playground safety, IPEMA provides a Third Party Certification Service which validates compliance.

#### 🥡 2010 ADA Standards for Accessible Design

The lay-out was also designed to meet the 2010 Standards published 15-Sep-2010, by the Department of Justice when installed over a properly maintained surfacing material that is in compliance with ASTM F1951 "Accessibility of Surface Systems Under and Around Playground Equipment" as well as ASTM F1292, "Impact Attenuation of Surfacing Materials Within the Use Zone of Playground Equipment", appropriate for the fall height of the structure.

#### Installation Times

Installation times are based on one experienced installer. A crew of three experienced individuals can perform the installation within the given time, each member working 1/3 of the given hours. [Eg. Installation Time = 30 hours. For a crew of three, each member will work 10 hours on the installation for a total of 30 hours on the project.]

#### Carbon Footprint

The CO2e (carbon footprint given in Kilograms and Metric Tons) listed above is a measure of the environmental impact this play structure represents from harvesting raw materials to the time it leaves our shipping dock. Playworld Systems nurtures a total corporate culture that is focused on eliminating carbon producing processes and products, reducing our use of precious raw materials, reusing materials whenever possible and recycling materials at every opportunity. Playworld Systems elected to adopt the Publicly Available Specification; PAS 2050 as published by the British Standards Institute and sponsored by Defra and the Carbon Trust. The PAS 2050 has gained international acceptance as a specification that measures the greenhouse gas emissions in services and goods throughout their entire life cycle.

#### Pre-Consumer Recycle Content

A measurement, in pounds, that qualifies the amount of material that was captured as waste and diverted from landfill during an initial manufacturing process and is being redirected to a separate manufacturing process to become a different product. E.g. 100% of our Aluminum Tubing is made from captured waste material during the manufacturing process of extruded Aluminum products such as rods, flat bars and H-channels.

#### Post-Consumer Recycle Content

A measurement, in pounds, that qualifies the amount of material that was once another product that has completed its lifecycle and has been diverted from a landfill as a solid waste through recycling and is now being used in a Playworld Systems' product. E.g. \*\*20% to 40% of the steel in our steel tubing and sheet steel have been diverted from landfills. Automobiles are scrapped and recyclable steel is purchased by the steel mill that produces our raw product. \*\* The amount of Post-Consumer recycled steel fluctuates daily based on the availability of the recycled steel.

